

ХТІРРА™

PRODUCT BROCHURE

PRODUCT BROCHURE - EN

DAVIT ARM XLT System




XTIRPA™


DAVIT ARM
XLT
System



Assembling scheme

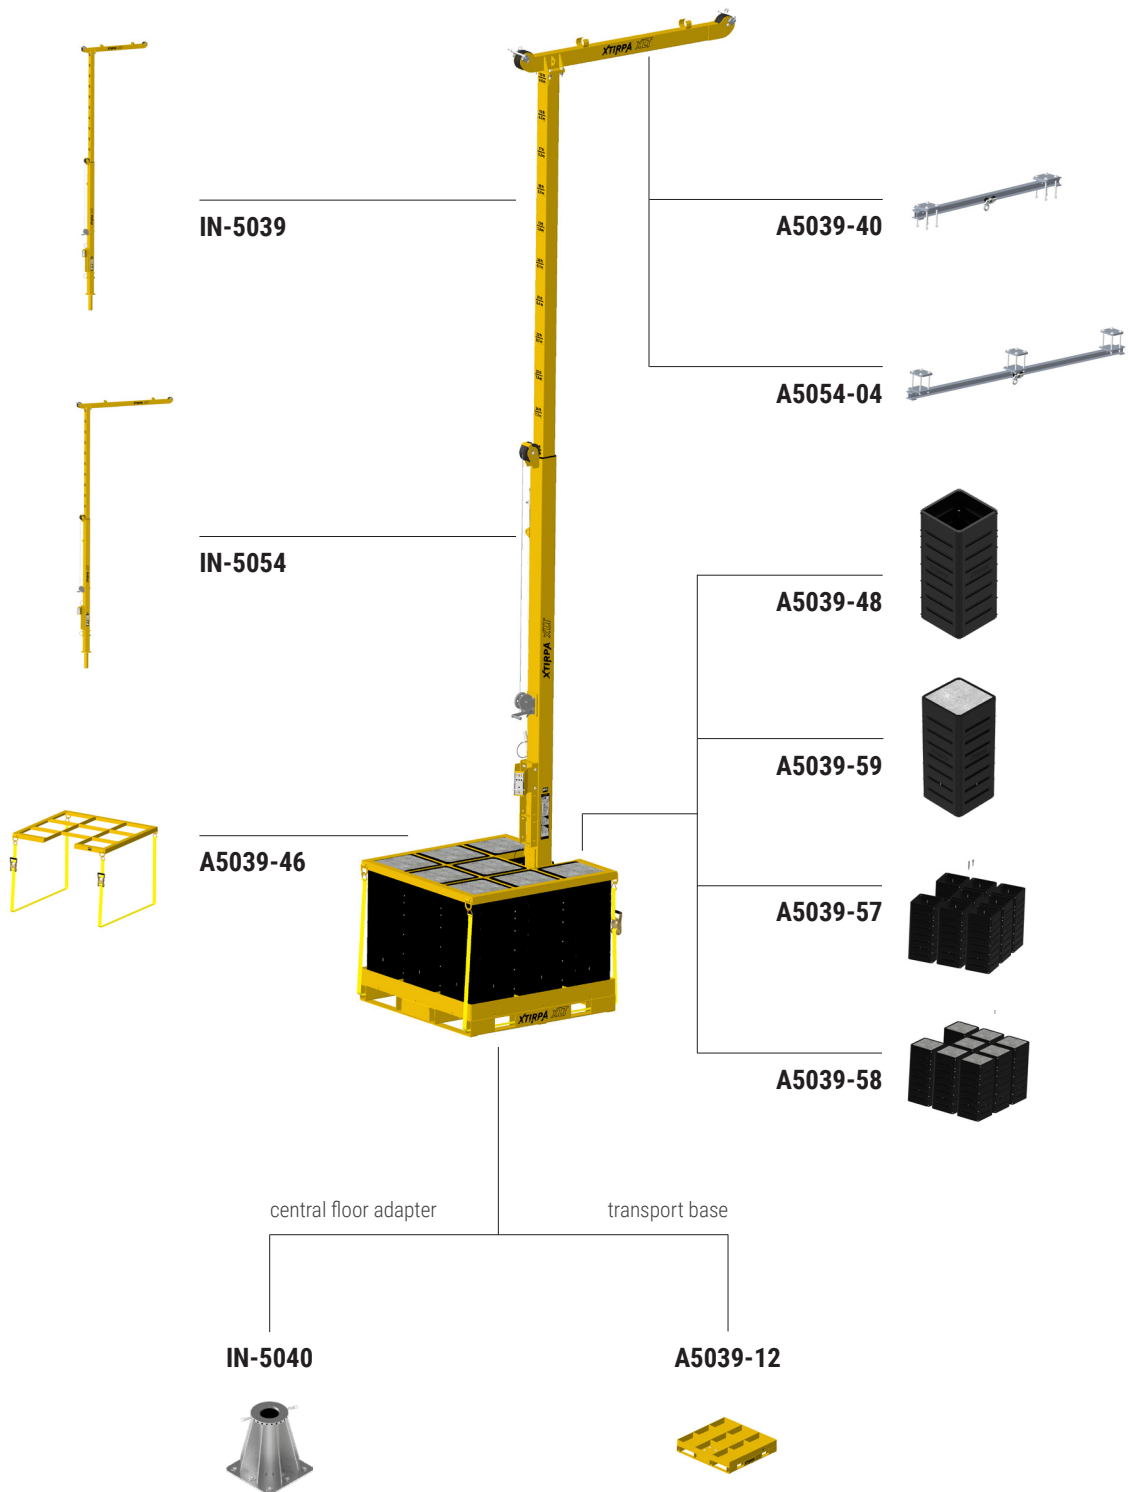

IN-5039 XLT System

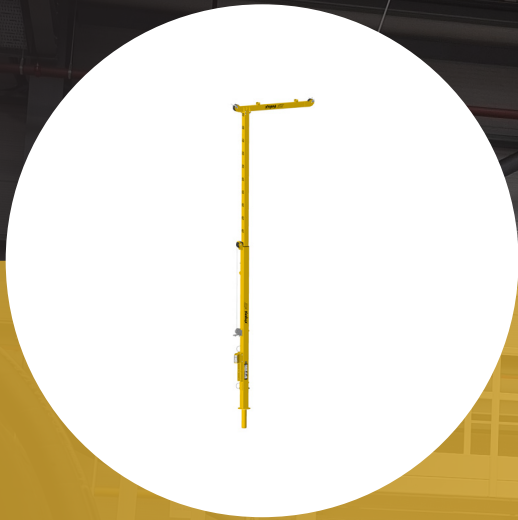

15 'to 25' (4572 mm to 7620 mm) adjustable mast / davit arm, 6' (1829 mm) reach, horizontal rail, trolley for self-retracting lifeline, locking mechanism in working position, height adjustment crank, self-retracting lifeline adapter and adapter for optional winch.

Material:
steel

Dimensions:
L 87" (2206mm)
W 15.4" (394 mm)
H 187"-304" (4762-7727 mm)

Weight:
630 lb (286 kg)

IN-5054 XLT System



15 'to 25' (4572 mm to 7620 mm) adjustable mast / davit arm, 9' (2743 mm) reach, locking mechanism in working position, height adjustment crank, self-retracting lifeline adapter and adapter for optional winch.

Material:
steel

Dimensions:
L 123" (3135 mm)
W 15.4" (392 mm)
H 187"-304" (4762-7727 mm)

Weight:
636.5 lb (288.7 kg)

DAVIT ARM XLT System

IN-5040

Central floor adapter



Central floor adapter allows the user to have a multitude of working angles. To be used with the XLT mast / davit arm IN-5039 or IN-5054. Anchor bolts included.
*Allowable working angle.

Material: AISI 304 stainless steel
Dimensions: L 17" (432 mm) x W 17" (432 mm) x H 18" (467 mm)
Weight: 135 lb (61 kg)

A5039-12

Transport base



Transport base for the installation of the (optional) central floor base IN-5040 and 8 concrete (optional) blocks A5039-58.

Material: Steel
Dimensions: L 57" (1448 mm) x W 57" (1448 mm) x H 10.5" (267 mm)
Weight: 538 lb (244 kg)

A5039-46

Structure for transport of concrete blocks



The structure is placed on the concrete blocks A5039-58 or the block molds A5039-57 filled with concrete to maximize stability when transported on the transport base A5039-12.


Material: steel
Dimensions: L 57" (1448 mm) x W 57" (1448 mm) x H 2.5" (63.5 mm)
Weight: 90 lb (41 kg)

A5039-48 / A5039-57 Concrete mold for XLT system (without concrete)

Mold used to pour concrete to create the necessary counterweights for the XLT system.
To be installed on the transport base A5039-12.

Set of 8 moulds available A5039-57.

Material: polyethylene
Dimensions: L 17.25" (438 mm) x W 17.25" (438 mm) x H 39.5" (1003 mm)
Weight: 30 lb (13.6 kg)

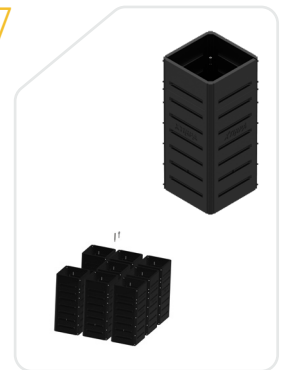

A5039-59 / A5039-58 Concrete block

To be installed on the transport base A5039-12 to create the necessary counterweights for the XLT system.

Set of 8 concrete blocks available A5039-58.

Material: Concrete 35MPa
Dimensions: L 17.25" (438 mm) x W 17.25" (438 mm) x H 39.5" (1003 mm)
Weight: 936 lb (424.5 kg)



A5039-40 / A5054-04 Horizontal rail

To be installed on the XLT arm IN-5039 or IN-5054 for having a second sliding anchor point.

Part	Length
A5039-40	72" (1828 mm)
A5054-04	108" (2743 mm)

Material: Aluminium



XTIRPA™
PRODUCT BROCHURE

YELLOW.
The true colour of
SAFETY.






XTIRPA

XTIRPA

CONFINED SPACE ACCESS AND RESCUE SYSTEMS

**ADVANCED DESIGN.
EASY ASSEMBLY.**

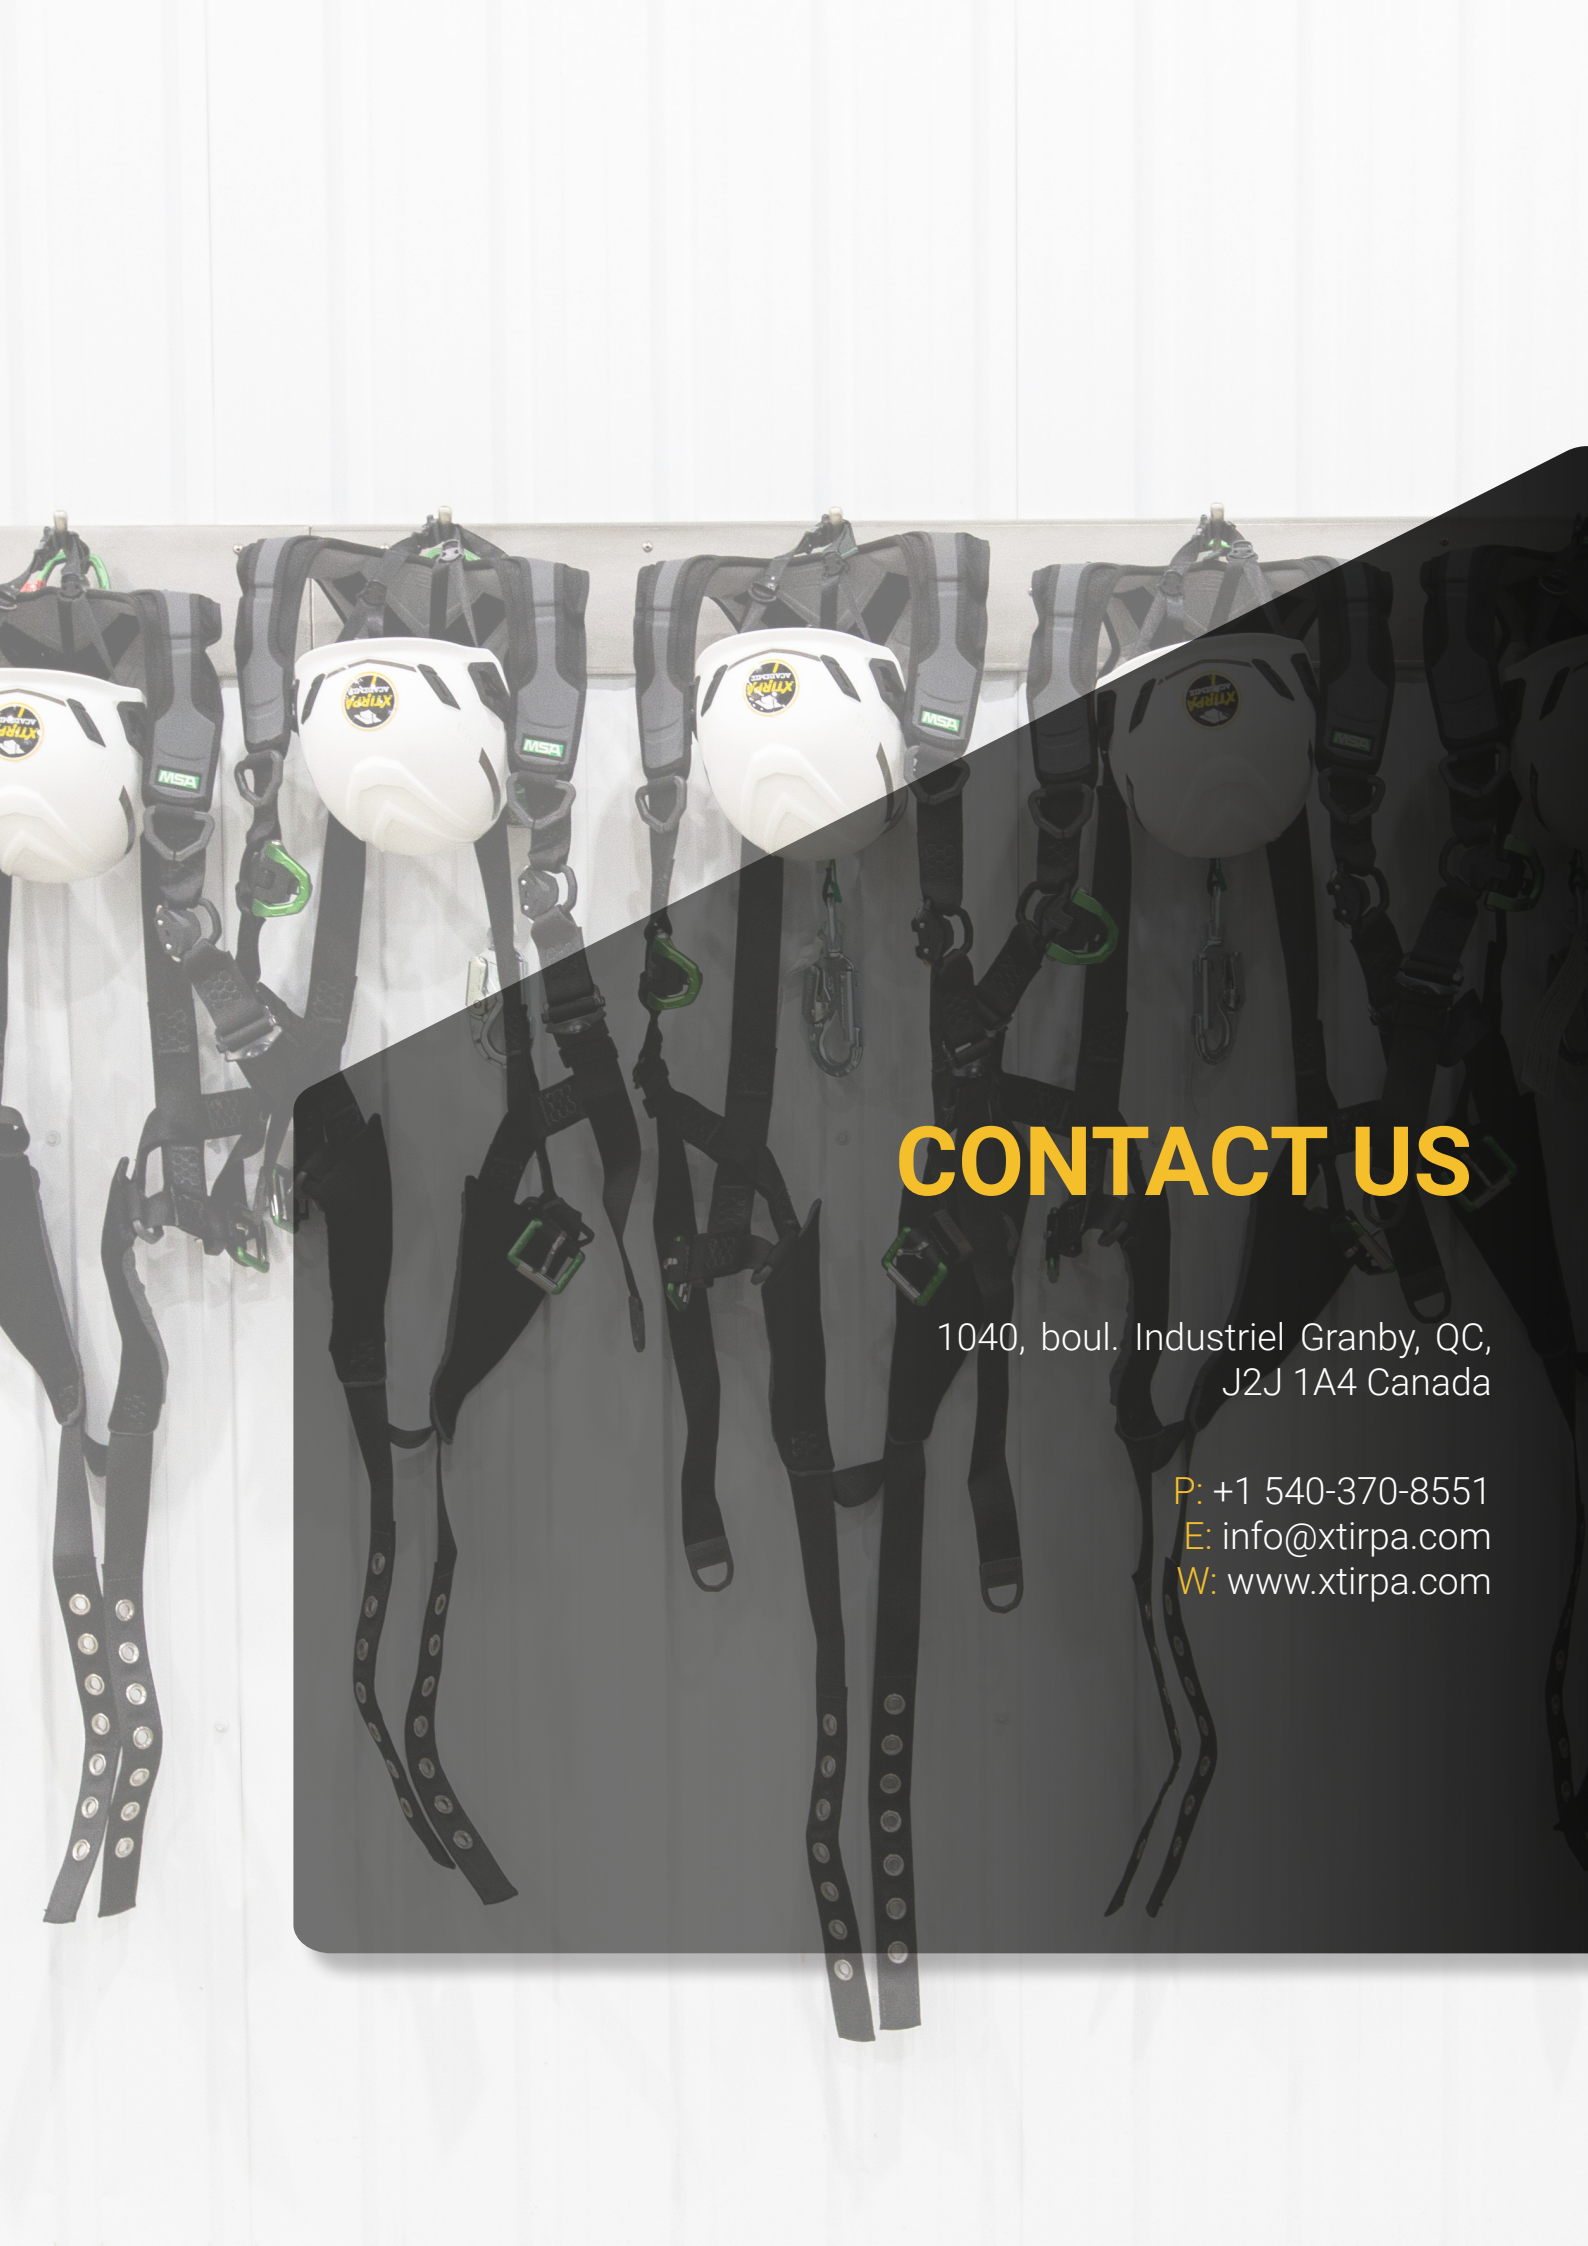

CONTACT US

1040, boul. Industriel Granby, QC,
J2J 1A4 Canada

P: +1 540-370-8551

E: info@xtirpa.com

W: www.xtirpa.com